


The Honeywell Miller Falcon™+, designed to withstand the harsh rigors of even the toughest applications, this self-retracting device is now part of the PLUS family of newly redesigned self-retracting device that meet all new global standards and features.

MATERIALS

Housing: High impact-resistant nylon
Lifeline: 0.69 in (17.5 mm) wide
 Core: Technora® (aramid fiber)
 Outer cover: Chemically treated polyester for increased abrasion resistance)
 7X19, 3/16 in galvanized
 7/32 in. galvanized steel cable
Snap Hook: Galvanized, zinc-plated steel
Carabiner: Galvanized, zinc-plated steel
Hub: ABS, Stainless steel or cast aluminum
Braking Mechanism: Brass, stainless steel or aluminum

TECHNICAL

Min. Working Capacity: 130 lb (59 kg)
Max. Working Capacity: For ANSI and CSA max. capacities, refer to models table on page 2
Working Length: 20 ft (6.1 m)
 30 ft (9.1 m)
 50 ft (15.2 m)

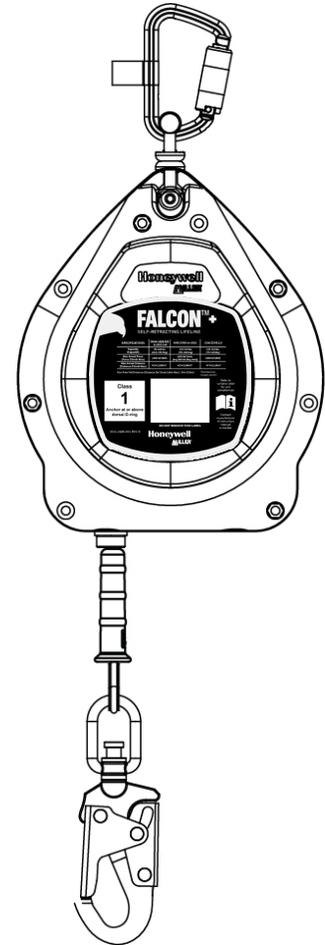

ANSI - ACTUAL PERFORMANCE BASED ON 310 lb (140 kg)*

| SRL LENGTH | ANCHOR LOCATION | DEVICE CLASS (ANSI Z359.142021) | AVERAGE FALL ARREST LOAD -ACTUAL- | PEAK FORCE -ACTUAL- | ARREST DISTANCE -ACTUAL- |
|----------------|------------------------|---------------------------------|-----------------------------------|---------------------|--------------------------|
| 20 ft to 50 ft | At/above D Ring Height | Class 1 | 900 lbf | 1250 lbf | 31 inches |

*Limits per standard.

| STANDARD | DEVICE CLASS | MAX. AVERAGE FALL ARREST FORCE | MAXIMUM PEAK FORCE | MAXIMUM ARREST DISTANCE | STATIC STRENGTH |
|----------|--------------|--------------------------------|--------------------|-------------------------|-----------------|
| ANSI | SRD Class 1 | 1350 lbf | 1800 lbf | 42 inches | 3600 lbf |
| CSA | Class SRL | 1350 lbf | 1800 lbf | 47 inches | 2900 lbf |



Load indicator steel snap hook w/swivel

CERTIFICATION

Meets OSHA 1926.502 and 1910.140, Certified ANSI Z359.14-2021 Class 1 and CSA Z259.2.2-2017 Class SRL

| MODEL | LENGTH | UNIT CONNECTOR | LIFELINE CONNECTOR | WEIGHT | MAX. WORKING LOAD | |
|---------------------------------|--------|-----------------|---|------------------|-------------------|-------------------|
| | | | | | ANSI /CSA | OSHA |
| FALCON+ GALVANIZED STEEL | | | | | | |
| MFS-OGC1-02/20FT | 20 ft | Steel Carabiner | Load indicator steel snap hook w/swivel | 8.9 lb (4 kg) | 310 lb (141 kg) | 420 lb (190.5 kg) |
| MFS-OGC1-02/30FT | 30 ft | Steel Carabiner | Load indicator steel snap hook w/swivel | 10.7 lb (4.8 kg) | 310 lb (141 kg) | 420 lb (190.5 kg) |
| MFS-OGC1-02/50FT | 50 ft | Steel Carabiner | Load indicator steel snap hook w/swivel | 14.8 lb (6.7 kg) | 310 lb (141 kg) | 420 lb (190.5 kg) |

Limitless Possibilities. Ask the Expert.
 Technical Service: 800.873.5242
www.honeywellsafety.com

Honeywell Safety Products USA, Inc.
 855 S Mint St
 Charlotte, NC 28202
www.honeywell.com

USA
 Phone: 800.430.5490
 Fax: 800.322.1330

Canada
 Phone: 888.212.7233
 Fax: 888.667.8477

 This equipment should only be used after reading and understanding the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.

© 2024 Honeywell International Inc. All rights reserved.

