

KStrong® Kapture™ Elite+ 5-Point FBH, Enhanced Dorsal D-ring Plus™, 2 Side D-rings, TB Legs, QC Chest, Back/ Shoulder Pad, All Black Fittings - (ANSI)

5-Point FBH, Back/Shoulder Pad, Enhanced Dorsal D-ring,
2 Side D-rings QC Chest, All Black Fittings, TB Legs

DESIGN

- One enhanced dorsal attachment D-ring for fall arrest
- Adjustable shoulder, leg & chest straps
- Equipped with back/shoulder pad
- Grommated leg straps
- Two lateral D-Rings for work positioning

WEBBING

Material: Polyester
Width: 1.73 in. $\pm$ 0.04 in. (44mm $\pm$ 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity Polyester

METAL COMPONENT

Material: Alloy Steel.
Finish : PCB


RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2014

MODEL	SIZE	WEIGHT
UFH15231GQ(S-M)	Small to Medium	4.43 lbs. $\pm$ 0.02 lbs. (2010 gm $\pm$ 10 gm)
UFH15231GQ(M-L)	Medium to Large	4.54 lbs. $\pm$ 0.02 lbs. (2060 gm $\pm$ 10 gm)
UFH15231GQ(L-XL)	Large to X-Large	4.65 lbs. $\pm$ 0.02 lbs. (2110 gm $\pm$ 10 gm)
UFH15231GQ(XL-2XL)	X-Large to 2X-Large	4.76 lbs. $\pm$ 0.02 lbs. (2160 gm $\pm$ 10 gm)



Dorsal D-ring Plus™
Fast, easy, and safe
installation of dual
SRL connector.

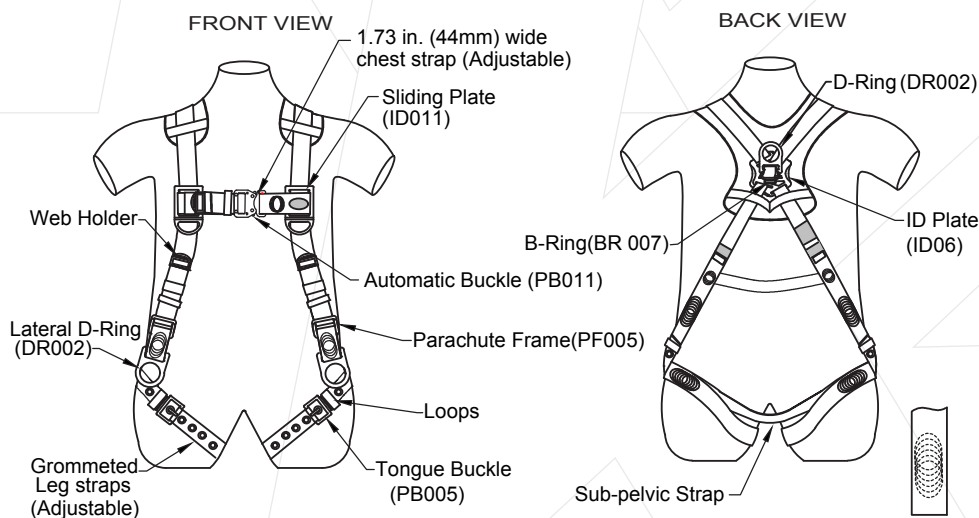

Meets or Exceeds ANSI Z359.11-2014