

KStrong® Micron™ 6 ft. Class 1 Personal SRL-P with Snap Hook (ANSI) - Installation Carabiner Included

Model: UFS350002

MICRON™
SRL SERIES

KStrong® 6 ft. Micron™ Lightweight SRL with one (1) snap hook at anchor end (ANSI). Includes one (1) quarter turn locking carabiner (UFC401101).

PHYSICAL PARAMETERS

- Lightest available SRL in its range/class
- Robust & durable plastic casing
- Dyneema Webbing with Energy absorber
- Steel snap hook at attachment end

LENGTH

6 ft.

WEBBING

Material: Dyneema Webbing 13/16" (21mm)
Min. Breaking strength: 4500 lbs.

WEIGHT

3.51 lbs. ± 0.22 lbs. (1592 gm ± 100 gm)

USER CAPACITY

OSHA Working Load Capacity: 420 lbs.
ANSI Working Load Capacity: 310 lbs.

RELEVANT STANDARDS


Meets or Exceeds ANSI Z359.14-2021 Class 1 SRL-P

Class
1
Anchor at or
above dorsal D-ring

**OSHA
RATED**
**420
LBS.**
MICRON



The Micron™ series of SRL's have not only been tested to ANSI Z359.14-2021 but also to a Fall Factor of 2. This means that when a preferred overhead anchor point is not present, a worker may connect to a suitable anchor up to 5 ft. below the dorsal D-ring height of their full body harness.

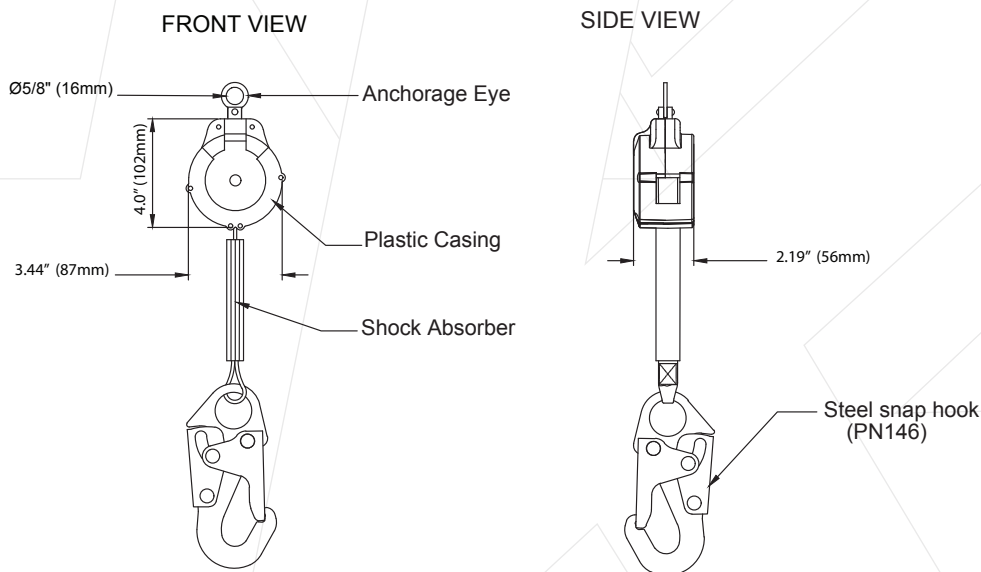

Batch #: _____ Serial #: _____
Date of First Use: _____