

# KStrong® Micron™ Dual 6 ft. Class 1 Personal SRL-P with Snap Hooks (ANSI) - Dual Dorsal Connector Included

Model: UFS350002D

**MICRON™**  
SRL SERIES

KStrong® Dual 6 ft. Micron™ Lightweight SRL assembly with one (1) snap hook at each anchor end (ANSI). Includes one (1) connector (UFC409151) to attach to harness.

## PHYSICAL PARAMETERS

- Lightest available SRL in its range/class
- Robust & durable plastic casing
- Dyneema Webbing with Energy absorber
- Steel snap hook at attachment end

## LENGTH

6 ft.

## WEBBING

Material: Dyneema Webbing 13/16" (21mm)  
Min. Breaking strength: 4500 lbs.

## WEIGHT

7.10 lbs. ± 0.22 lbs. (3221 gm ± 100 gm)

## USER CAPACITY

OSHA Working Load Capacity: 420 lbs.  
ANSI Working Load Capacity: 310 lbs.

## RELEVANT STANDARDS


Meets or Exceeds ANSI Z359.14-2021 Class 1

**Class**  
**1**  
Anchor at or  
above dorsal D-ring

**OSHA  
RATED**  
**420  
LBS.**  
**MICRON**



The Micron™ series of SRL's have not only been tested to ANSI Z359.14-2021 but also to a Fall Factor of 2. This means that when a preferred overhead anchor point is not present, a worker may connect to a suitable anchor up to 5 ft. below the dorsal D-ring height of their full body harness.

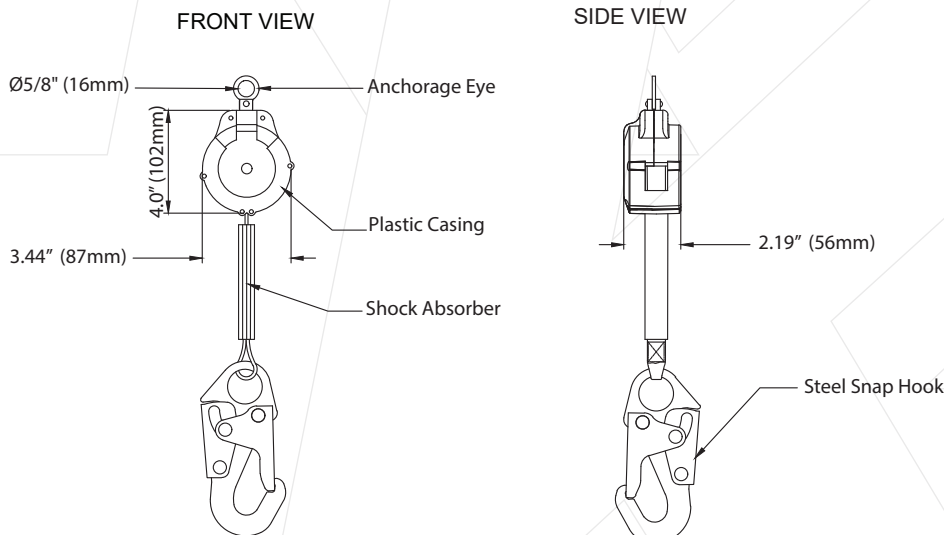

Batch #: \_\_\_\_\_ Serial #: \_\_\_\_\_  
Date of First Use: \_\_\_\_\_