

KStrong® Megapod™ 10 ft. Adjustable with Dual Build-In Pulley Assembly and Storage Bag

Model: UFT510010

DESIGN

- Includes two (2) pre-installed Universal Lower Assembly Mounting Bracket Receivers (UFT510010B2) for the quick mounting of KStrong material/personnel winches.

Special Note: Installation of a KStrong 3-Way Rescue/Retrieval SRL-R requires an additional upper mounting bracket (Part # UFT510010B), which is sold separately.

- Two pulley system provided to pass the wire rope of winch mounted on one leg and retrieval block on the other leg simultaneously
- Securely connected eyebolts (2) to be used for connection to personal protective equipment
- Adjustable height from 74.80" (1.90m) to 120.86" (3.07m) from ground level
- Adjustment achieved by sliding telescopic legs
- Locking pins attached by SS cables



LOAD CAPACITY

310 lbs. (550kg)

PARTS

Material: Aluminum alloy
Finish: Anodized

HEAD

Material: Aluminum alloy
Finish: Powder coated black

LOCKING PINS

Material: Stainless steel
Finish: Electropolished

LEGS

Material: Aluminum Finish
Finish: Powder Coating/Anodizing


WEIGHT

59.89 lbs. (27.17kg) ± 0.22 lbs. (0.10kg)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.18-2017 Type A

ADJUSTMENT	OVERALL HEIGHT	OUTER OPENING RADIUS
1	Min. 74.80" (1900mm)	Min. R72.24" (1835mm)
2	111.96" (2844mm)	R112.68" (2863mm)
3	113.78" (2890mm)	R114.37" (2905mm)
4	115.59" (2936mm)	R116.06" (2948mm)
5	117.40" (2982mm)	R117.75" (2991mm)
6	Max. 120.86" (3070mm)	Max. R119.44" (3034mm)

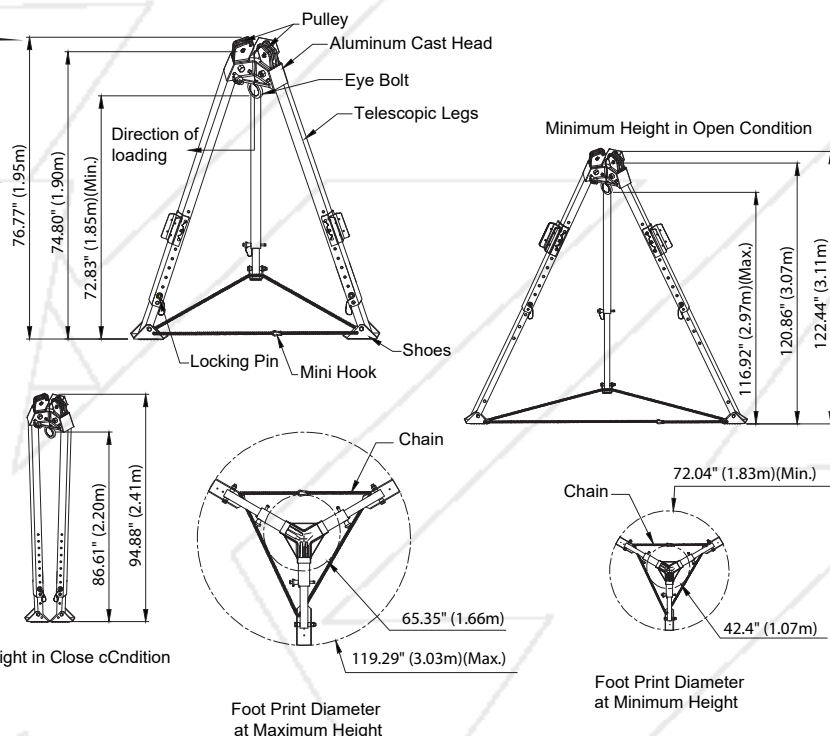

Batch #: _____ Serial #: _____
Date of First Use: _____