

KStrong® Megapod™ 10 ft. Deluxe Kit. Includes Tripod, 60 ft. 3-way Rescue Retrieval SRL-R with Mounting Bracket, 60 ft. Material / Personnel Winch, and Storage Bags for Tripod / Equipment

Model: UFT510010DK

INCLUDES

- Tripod (UFT510010)
- 60 ft. 3-way Rescue Retrieval SRL-R with Upper Mounting Bracket (UFS310060R and UFT510010B)
- 60 ft. Material / Personnel Winch (UFT530060)
- Storage Bag for Tripod (UFZ810020)
- 2 qty. Universal Lower Assembly Mounting Bracket Receivers (UFT510010B2) – Pre-installed on tripod legs.

DESIGN

- Adjustable height from 76.69"(1.95m) to 115.35"(2.93m) from ground level
- Adjustment achieved by sliding telescopic legs
- Locking pins attached by SS cables.
- Securely connected eyebolts (2) to be used for connection to personal protective equipment
- Two pulley system provided to pass the wire rope of winch mounted on one leg and retrieval block on the other leg simultaneously
- Preinstalled mounting brackets on the legs for installation of compatible winch and retrieval system

LOAD CAPACITY

310 lbs. (550kg)

MEGAPOD LEGS

Material: Aluminum Alloy
Finish: Anodized

HEAD

Material: Aluminum Alloy
Finish: Powder Coated Black

LOCKING PINS

Material: Stainless steel
Finish: Electropolished

LEGS


Material: Aluminum Finish
Finish: Powder Coating/Anodizing

WEIGHT


59.89 lbs. (27.17kg) ± 0.22 lbs. (0.10kg)

RELEVANT STANDARDS


Meets or Exceeds ANSI Z359.18-2017 Type A

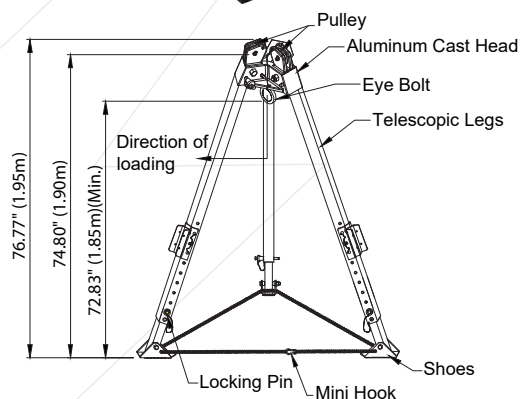


Minimum Height in Open Condition




Foot Print Diameter at Maximum Height

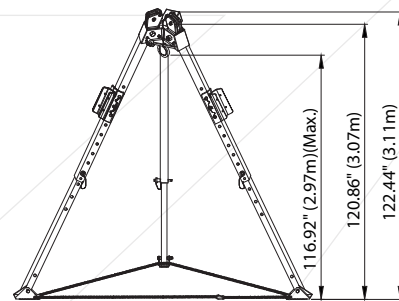

Maximum Height in Open Condition



Height in Close cCondition



Foot Print Diameter at Minimum Height

Batch #: _____ Serial #: _____
Date of First Use: _____