

Model: UFH10332P

KStrong® Kapture™ Epic+ 5-Point Full Body Harness, Waist Pad w/ Removable Tool Belt, Back/Shoulder Pad, Enhanced Dorsal D-ring, 2 Side D-rings, QC Chest and Legs -(ANSI)

5-Point FBH, Padded Waist w/Tool Belt, Back/Shoulder Pad, Enhanced Dorsal D-ring, 2 Side D-rings, QC Chest and Legs

MODEL	SIZE	WEIGHT
UFH10332P(S-M)	Small to Medium	$5.42 \text{ lbs.} \pm 0.02 \text{ lbs.}$ (2460 gm $\pm 10 \text{ gm}$)
UFH10332P(M-L)	Medium to Large	$5.53 \text{ lbs.} \pm 0.02 \text{ lbs.}$ (2510 gm $\pm 10 \text{ gm}$)
UFH10332P(L-XL)	Large to X-Large	5.64 lbs. ± 0.02 lbs. (2560 gm ±10 gm)
UFH10332P(XL-2XL)	X-Large to 2X-Large	5.75 lbs. ± 0.02 lbs. (2610 gm ±10 gm)
UFH10332P(2XL-3XL)	2X-Large to 3X-Large	5.86 lbs. ± 0.02 lbs. (2660 gm ±10 gm)

DESIGN

- One dorsal attachment D-ring for fall arrest
- Adjustable shoulder straps
- Adjustable leg straps
- Equipped with work positioning belt

WEBBING

Material: Polyester

Width: 1.73 in. \pm 0.04 in. (44mm \pm 1mm)

Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity Polyester


METAL COMPONENT


Material: Alloy Steel

Finish: Silver or Golden Yellow Galvanized

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2014

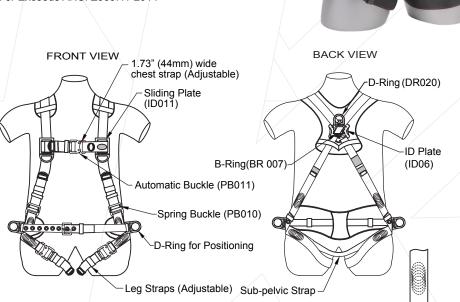



00000



Dorsal D-ring Plus™ Fast, easy, and safe installation of dual SRL connector.