

PMXTREME®

UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience the perfect blend of comfort and protection with PMXTREME® safety glasses. The lightweight design with vented and flexible temples, and wraparound lens ensure clear vision and a secure fit without compromising comfort.



INCLUDES
STRAP



RUBBER
NOSE PIECE




RUBBER
TIPS



ANTI-FOG
OPTIONS



READER
OPTIONS

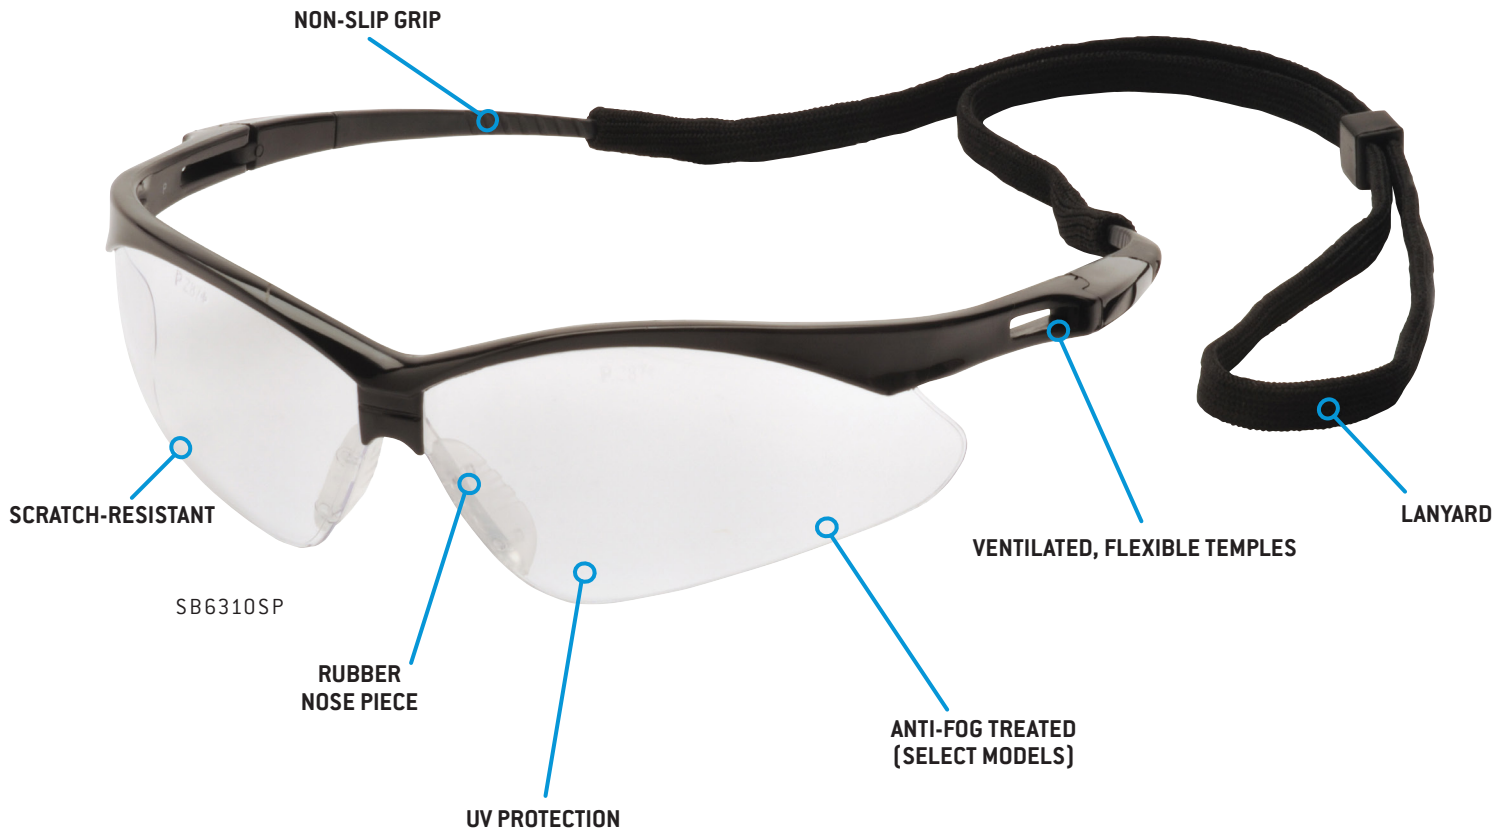

FEATURES

All-Day Comfort: Designed with lightweight, half frames to provide a comfortable fit and clear vision

Enhanced Field of Vision: Panoramic polycarbonate, wraparound lens offers an extended field of vision crucial for safety in busy work environments, while also providing UV protection for comprehensive eye safety

Comfort Grip Fit: Rubber nose piece and temple tips, paired with ventilated straight back temples, provide a secure fit and enhanced breathability for prolonged wear

Secure Strap: Black lanyard cord prevents loss or damage in busy work environments

Anti-Fog Clarity (Select Models): Anti-fog lenses ensure clear vision in all conditions

Built Tough: Meets ANSI/ISEA Z87.1-2020 for eye and face protection devices

PMXTREME®

UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience the perfect blend of comfort and protection with PMXTREME® safety glasses. The lightweight design with vented and flexible temples, and wraparound lens ensure clear vision and a secure fit without compromising comfort.



INCLUDES
STRAP



RUBBER
NOSE PIECE



RUBBER
TIPS



ANTI-FOG
OPTIONS



READER
OPTIONS

VARIATIONS

Black Frame with Cord | 11 Variations

SB6310SP	Clear
SB6310STP	Clear AF
SB6320SP	Gray
SB6320STP	Gray AF
SB6330SP	Amber
SB6345SP	Ice Orange Mirror
SB6360SP	Infinity Blue
SB6370SP	Silver Mirror
SB6375SP	Blue Mirror
SB6376SP	Smoke Green Mirror
SB6380SP	I/O Mirror

Camo Frame with Cord | 2 Variations

SCM6318STP	Sandstone Bronze AF
SCM6320STP	Gray AF

Red Frame with Cord | 1 Variation

SR6320SP	Gray
----------	------

Silver Frame with Cord | 2 Variations

SS6310SP	Clear
SS6365SP	Ice Blue Mirror



MATERIALS

Lens	Temples	Frame	Hinge	Screw
Polycarbonate	Nylon	Nylon	Polycarbonate	Stainless Steel

MARKINGS

Part No.	Lens Marking	Frame Marking	Lens Marking Symbols	Temple Marking Symbols	Measurements
SB6310SP	P + U6	P Z87 +	P: Manufacturer's Mark	P: Manufacturer's Mark	Weight: 23.1 gm
SB6310STP	P + U6	P Z87 +	Z87: ANSI/ISEA Z87.1-2020 Standard for Eye and Face Protection Devices	Z87: ANSI/ISEA Z87.1-2020 Standard for Eye and Face Protection Devices	PD: 64 mm
SB6320SP	P + U6 L3	P Z87 +	+: High Impact	+: High Impact	Bridge: 17.27 mm
SB6320STP	P + U6 L3	P Z87 +	S: Special Purpose		Lens Base: 10 curve
SB6330SP	P + U6	P Z87 +	X: Tested Anti-fog		Lens Size Diagonal: 77.08 mm
SB6345SP	P + U6 L3	P Z87 +	UV Filter Transmittance		Lens Size Vertical: 43.38 mm
SB6360SP	P + U6 L1.3	P Z87 +	U6: .01% Max Effective Far UV • .1% Max Near U		Lens Thickness: 2.5 mm
SB6370SP	P + U6 L3	P Z87 +	Visible Light Filters		Overall Length (lens - tip): 156 mm
SB6375SP	P + U6 L3	P Z87 +	L1.3: 18% Max Visible Light		Overall Width (hinge - hinge): 135.5 mm
SB6376SP	P + U6 L3	P Z87 +	L1.7: 55% Max Visible Light		Closest Point Between Lens: 16.67 mm
SB6380SP	P + U6 L1.7	P Z87 +	L2.5: 29% Max Visible Light		
SCM6318STP	P + U6 L2.5	P Z87 +			
SCM6320STP					
SR6320SP					
SS6310SP					
SS6365SP					

Product markings may vary // Updated as of 3.25